



BOONE COUNTY, MISSOURI
Request for Bid #: 36-12SEP13
Andrew Sapp Rd. & Old Mill Creek Rd. Bridge Repairs

ADDENDUM #1 - Issued September 10, 2013


This addendum is issued in accordance with the Request for Bid Project Plans and/or Details and is hereby incorporated into and made a part of the Request for Bid Documents. Offerors are reminded that receipt of this addendum **SHOULD** be acknowledged and submitted with Offeror's *Response Form*.

Specifications and Plans for the above noted Request for Bid and the work covered thereby are herein modified as follows, and except as set forth herein, otherwise remain unchanged and in full force and effect:

1. Excavated materials may be wasted on site. This material shall be spread evenly around site (not piled), covered with minimum of 4" of top soil, seeded, and mulched. No additional payment will be made for stabilization of relocated excavated material
2. At the Contractor's discretion, the Mechanically Stabilized Fill (MSF) system may be stair stepped at approximately a 1:1 slope on the end opposite the bridge abutment. This means that the bottom course of a 7.5' deep MSF may be shorted by 7.5' from that which would have been required with a vertical excavation. Each subsequent course shall be evenly lengthened to reach the planned length for the top course.

By: 
Amy Robbins, Buyer
Boone County Purchasing

Approved:

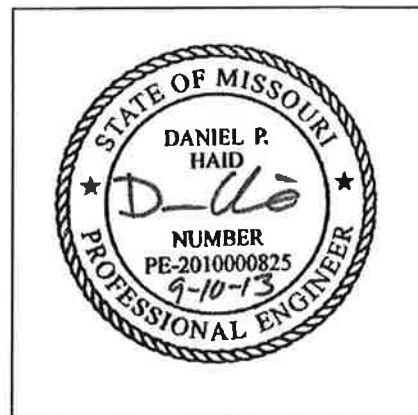

OFFEROR has examined copy of Addendum #1 to Request for Bid # 36-12SEP13, Andrew Sapp Rd. & Old Mill Creek Rd. Bridge Repairs, receipt of which is hereby acknowledged:

Company Name: _____

Address: _____

Phone Number: _____ Fax Number: _____

Authorized Representative Signature: _____ Date: _____

Authorized Representative Printed Name: _____