



BOONE COUNTY, MISSOURI
Request for Bid #: 35-14AUG14
PINNACLES RD. & BREEDLOVE RD. BRIDGE REPAIRS

ADDENDUM #1 - Issued August 18, 2014

This addendum is issued in accordance with the Request for Bid Project Plans and/or Details and is hereby incorporated into and made a part of the Request for Bid Documents. Offerors are reminded that receipt of this addendum **SHOULD** be acknowledged and submitted with Offeror's *Response Form*.

Specifications and Plans for the above noted Request for Bid and the work covered thereby are herein modified as follows, and except as set forth herein, otherwise remain unchanged and in full force and effect:

1. Work associated with item 'Patch Bearing Spall' shall be as described below:


'Spalled areas and area within one foot surrounding spall shall be cleaned of loose debris and sealed with an epoxy seal'

2. Original Bid form shall be replaced with attached REVISED BID FORM. Change to bid form is units for item 'Full Depth Deck Repair' from square yards to square feet.

3. Limits of Type 2 Rock Blanket as shown on the plans is approximate, field conditions will dictate actual amount and location of rock used. The location is not expected to extend any further from abutment shown. Actual quantity used will be basis for payment.

By: 
Amy Robbins, Buyer
Boone County Purchasing

Approved:

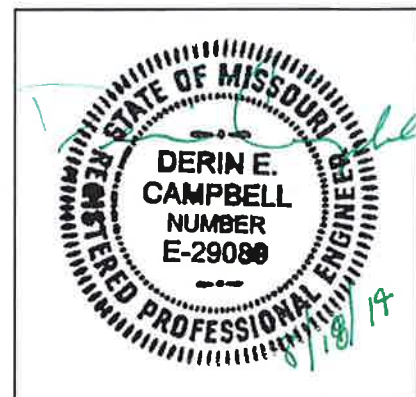

OFFEROR has examined copy of Addendum #1 to Request for Bid # 35-14AUG14, Pinnacles Rd. & Breedlove Rd. Bridge Repairs, receipt of which is hereby acknowledged:

Company Name: _____

Address: _____

Phone Number: _____ Fax Number: _____

Authorized Representative Signature: _____ Date: _____

Authorized Representative Printed Name: _____

REVISED BID FORM

**PINNACLES RD. & BREEDLOVE RD. BRIDGE REPAIRS
35-14AUG14**

Description		Unit	Qty.	Unit Price	Total
Pinnacles Rd.	Mobilization	LS	1	\$	\$
	Traffic Control	LS	1	\$	\$
	Hydro-Demolition, Full Surface w/ Vacuum System	SY	206	\$	\$
	Full Depth Deck Repair	SF	20	\$	\$
	Latex Modified Concrete	CY	11.4	\$	\$
	Latex Modified Concrete Wearing Surface Installation	SY	206	\$	\$
	GRS/MSF System Approach Repair	SY	49	\$	\$
	Pavement Patch	SY	62	\$	\$
	Type 2 Rock Blanket	TON	80	\$	\$
	Vertical Drain	LF	22	\$	\$
	4" Sch 40 PVC Drain Pipe	LF	40	\$	\$
	Pile Clean & Coat	EA	5	\$	\$
	Bearing Pad Installation	EA	8	\$	\$
	Abutment/Beam Encasement Prep Work & Reinforcement	LS	1	\$	\$
	Concrete for Abutment/Girder Encasement	CY	2.3	\$	\$
	Patch Bearing Spall	EA	4	\$	\$
	Erosion Control	LS	1	\$	\$
Seeding and Restoration	LS	1	\$	\$	
Pinnacles Rd. Bridge Total					\$

Breedlove Rd.	Mobilization	LS	1	\$	\$
	Traffic Control	LS	1	\$	\$
	Hydro-Demolition, Full Surface w/ Vacuum System	SY	226	\$	\$
	Full Depth Deck Repair	SF	20	\$	\$
	Latex Modified Concrete	CY	12.6	\$	\$
	Latex Modified Concrete Wearing Surface Installation	SY	226	\$	\$
	Pavement Patch	SY	100	\$	\$
Breedlove Rd. Bridge Total					\$

Combined Total					\$
-----------------------	--	--	--	--	-----------

All items shown on the project plan sheets and not included in the above bid items shall be deemed incidental to the project and included in the unit prices given. In case of error in the extension, the unit price times the estimated quantity will govern.